


| LTR | DESCRIPTION | DATE | BY |
|-----|-------------|--------|----|
| - | Released | 3/9/04 | MS |
| | | | |

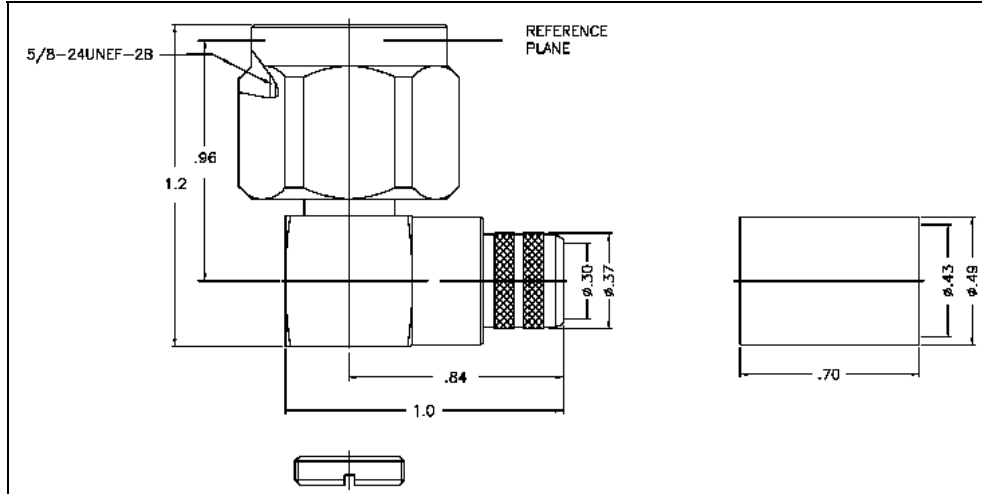

I. MATERIALS & FINISHES

- center contact: Gold Plated Brass
- outer contact: Gold Plated Phosphor Bronze
- body: Stainless Steel
- coupling nut: Stainless Steel
- crimp sleeve: Alballoy Plated Brass
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- attachment: braid crimp (.429" hex)

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.25:1 (max) up to 2.5 GHz
- insertion loss: 0.15 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

| Approvals | | |
|-----------|-----|--------|
| Drawn | JCL | 3/9/04 |
| | | |
| | | |
| | | |



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-400-NMH-RA-SS

**N Male (Plug) Right Angle
 for TCOM-400-FS-DB Cable**

| | | |
|--------|---------------------------|----------------------------------|
| Size A | CAGE CODE 68999 | Drawing No.: 3190-1668 |
|--------|---------------------------|----------------------------------|

| | | |
|-----------|----------|---------------|
| Scale: NA | Rev. (-) | Sheet: 1 of 1 |
|-----------|----------|---------------|