





Aero-Electric Connector

26482 Series I Solder



Military » Aerospace » Geophysical » Industrial » Transportation

conesys.com

MIL-DTL-26482
Part Number Development
Series I






Military and Aero-Electric Part Number Development

Mil. Prefix	MS311	0	F	12 -	10	P	W		
Aero Prefix	AE71	0	F	12 -	10	P	W	T	
Shell type									
<p>2 = Box mount receptacle</p> <p>4 = Jam Nut receptacle</p>									
Class									
<p>"E", "F", "J", "A" (commercial Only)</p>									
Shell Size									
<p>8 Thru 24 (single digit for shell size 8)</p>									
Insert Arrangement									
<p>See pages 11 thru 14</p>									
Contact Style									
<p>P = Pin</p> <p>S = Socket</p>									
Insert Position									
<p>Blank = Normal</p> <p>W, X, Y or Z = Alternate Insert Positions</p>									
Finish (Material & Plating) (valid for Aero commercial part # only)									
<p>Blank = Aluminum, Cadmium/Olive Drab (Mil Spec Qualified)(AE part number only, not needed for MS)</p> <p>YL = Aluminum, Zinc Nickel (black)(RoHS) (Commercial, AE part number only)</p> <p>S = Aluminum, Black Electroless Nickel (RoHS) (Commercial, AE part number only)</p> <p>ZL = Aluminum, Zinc Cobalt (black) (RoHS) (Commercial, AE part number only)</p> <p>T = Aluminum, Electroless Nickel (RoHS) (Commercial, AE part number only)</p> <p>A = Aluminum, Hard Black Anodize (RoHS) (Commercial, AE part number only)</p> <p>ZG = Aluminum, Zinc Cobalt, Olive Drab, over Nickel base (RoHS) (Commercial, AE part number only)</p>									
Modification (applies to Aero part numbers only)									
<p>Refer to pages 16-19 for PC tail contacts</p> <p>For other modifications, such as rear accessories, other finishes and materials, etc., please consult factory</p>									

26482 S I



MS3112 / AE712 Box Mount Receptacle

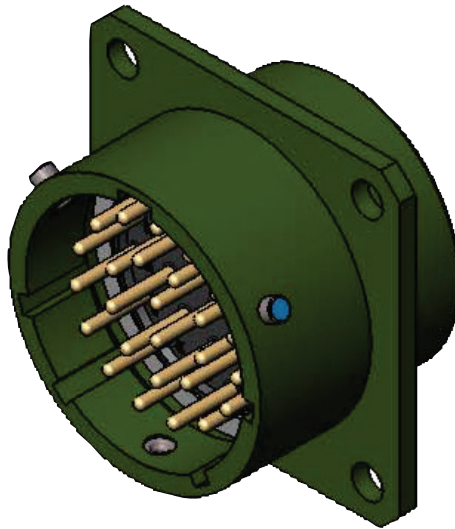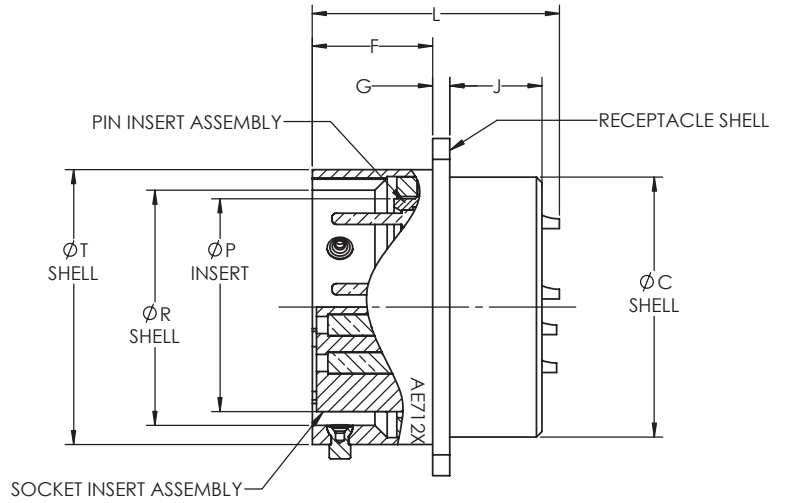
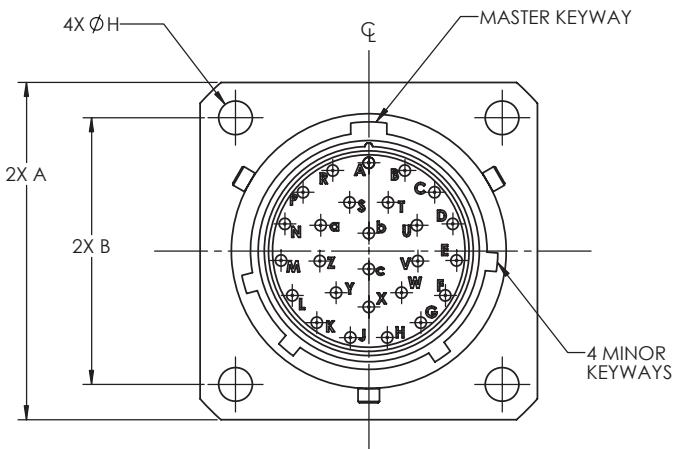


SHELL SIZE	A MAX.	B	ØC +.031 -.016	F +.031 -.000	G ±.016	ØH	J Max	L Max Overall Length	ØP MAX.		ØT
									inch	inch	
8	.828	.594	.438	.431	.062	.120	.354	.975	.285	.367 .361	.474 .468
10	.954	.719	.562						.495 .489	.591 .585	
12	1.047	.812	.688						.612 .606	.751 .745	
14	1.141	.906	.812						.641 .737 .731	.876 .870	
16	1.234	.969	.938	.556	.094	.147	.417	1.196	.766	.862 .856	1.001 .995
18	1.328	1.062	1.062						.855	.967 .961	1.126 1.120
20	1.453	1.158	1.156						.980	1.092 1.086	1.251 1.245
22	1.578	1.250	1.250	.589					1.105	1.217 1.211	1.376 1.370
24	1.700	1.375	1.375						1.229	1.342 1.336	1.501 1.495

MS3114
Jam Nut Receptacle
AE714



MS3114 / AE714 Jam Nut Receptacle

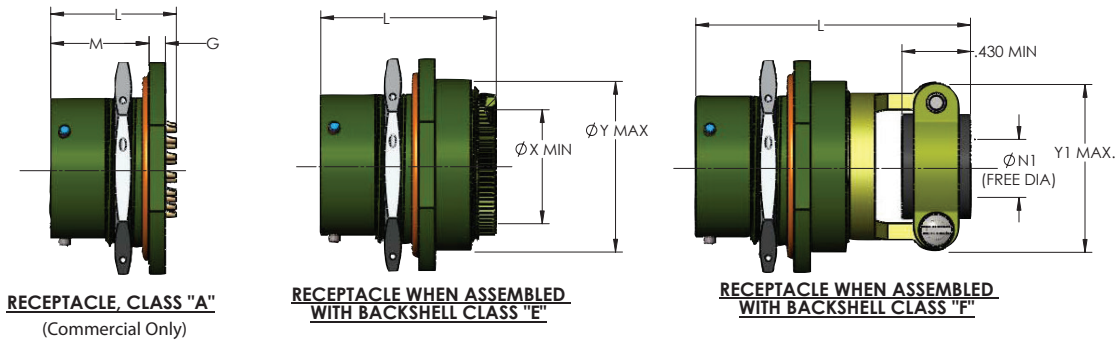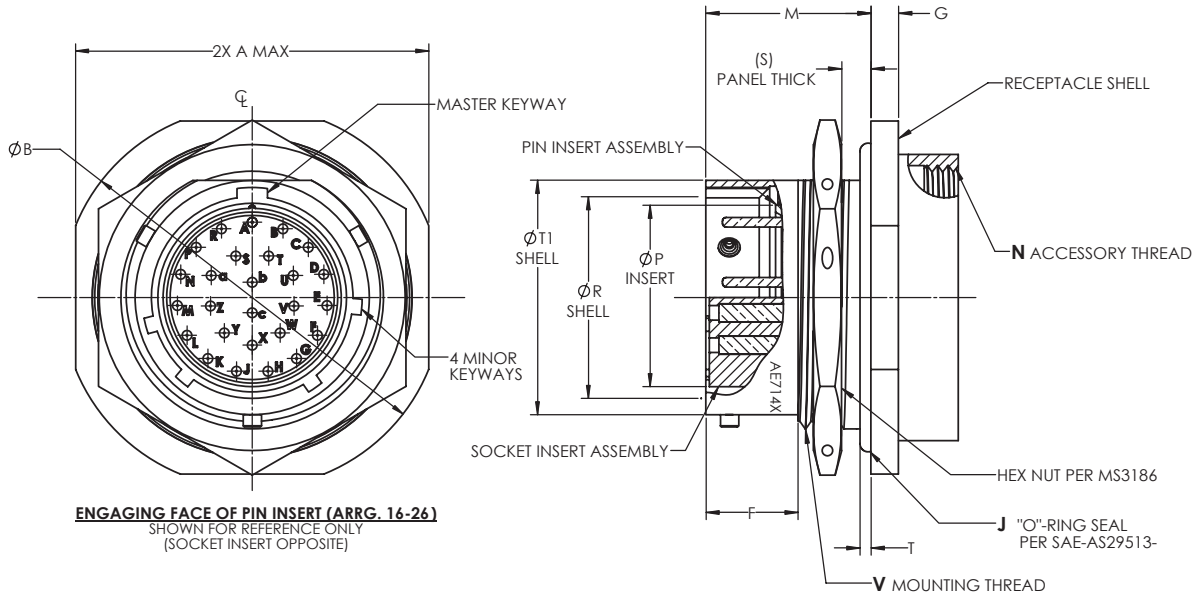


26482 S I

SHELL SIZE	A MAX.		ØB		F MIN.	G ±.020 (±.508)	J SAE-AS29513-	L Max Overall Length			M +.031 -0.000 (+.787) (-.000)	V Thread UNEF-2A	N Thread UNEF-2B	ØN1 ±.010 (±.254)		T ±.011 (±.279)	ØT1	ØP MAX.		ØR		S ref.	ØX Min.		ØY MAX.	Y1 MAX.		
	inch	mm	inch	mm				Class E	Class F (bushing included)	Class A				inch	mm			inch	mm	inch	mm		inch	mm			inch	mm
8	.954	24.23	1.078	27.38			-017					.5625-24	.625-24	.125	3.18	.474 .468	.285	7.24	.367 .361	9.32 9.16		.269	6.83	.750 (19.05)	.828 (21.03)			
10	1.078	27.38	1.203	30.56			-019		1.906			.6875-24	.750-20	.188	4.78	.591 .585	.402	10.21	.495 .489	12.57 12.42		.359	9.12	.875 (22.23)	.891 (22.63)			
12	1.266	32.16	1.391	35.33	.384	.117	-022	1.344	(48.41)	.980	.691 (17.55)	.875-20	.875-20	.312	7.92	.751 .745	.516	13.11	.612 .606	15.55 15.39	.125 .062	.469	11.91	1.000 (25.40)	1.016 (25.81)			
14	1.391	35.33	1.516	38.51	(9.75)	(2.97)	-024	(34.14)				1.000-20	1.000-20	.375	9.52	.876 .870	.641	16.28	.737 .731	18.72 18.57	(3.17) (1.57)	.589	14.96	1.125 (28.58)	1.141 (28.98)			
16	1.516	38.51	1.641	41.68			-026		2.047 (51.99)			1.125-18	1.125-18	.500	12.70	1.001 .995	.766	19.46	.862 .856	21.90 21.42		.727	18.47	1.250 (31.75)	1.203 (30.56)			
18	1.641	41.68	1.766	44.86			-028		2.078 (52.78)			1.250-18	1.250-18		15.87	1.126 1.120	.855	21.72	.967 .961	24.56 24.41		.779	19.79	1.375 (34.93)	1.469 (37.31)			
20	1.828	46.43	1.954	49.63	.446	.148	-128	1.594	2.328	1.198	.879 (22.33)	1.375-18	1.375-18	.625	15.87	1.251 1.245	.980	24.90	1.092 1.086	27.73 27.58	.250 .062	.901	22.88	1.531 (38.89)	1.656 (42.06)			
22	1.954	49.63	2.078	52.78	(11.33)	(3.76)	-130	(40.68)	(59.13)	(30.43)		1.500-18	1.500-18	.750	19.05	1.376 1.370	1.105	28.07	1.217 1.211	30.91 30.75	(6.35) (1.57)	1.009	25.63	1.656 (42.06)	1.656 (42.06)			
24	2.078	52.78	2.203	55.96	.479 (12.17)		-132	1.641 (41.68)	2.453 (62.31)	1.230 (31.24)	.912 (23.16)	1.625-18	1.625-18	.800	20.32	1.501 1.495	1.229	31.22	1.342 1.336	34.09 33.93		1.123	28.52	1.781 (45.24)	1.750 (44.45)			

MS3180
Protective Cover, Plug
AE1580



Protective Cover, Plug

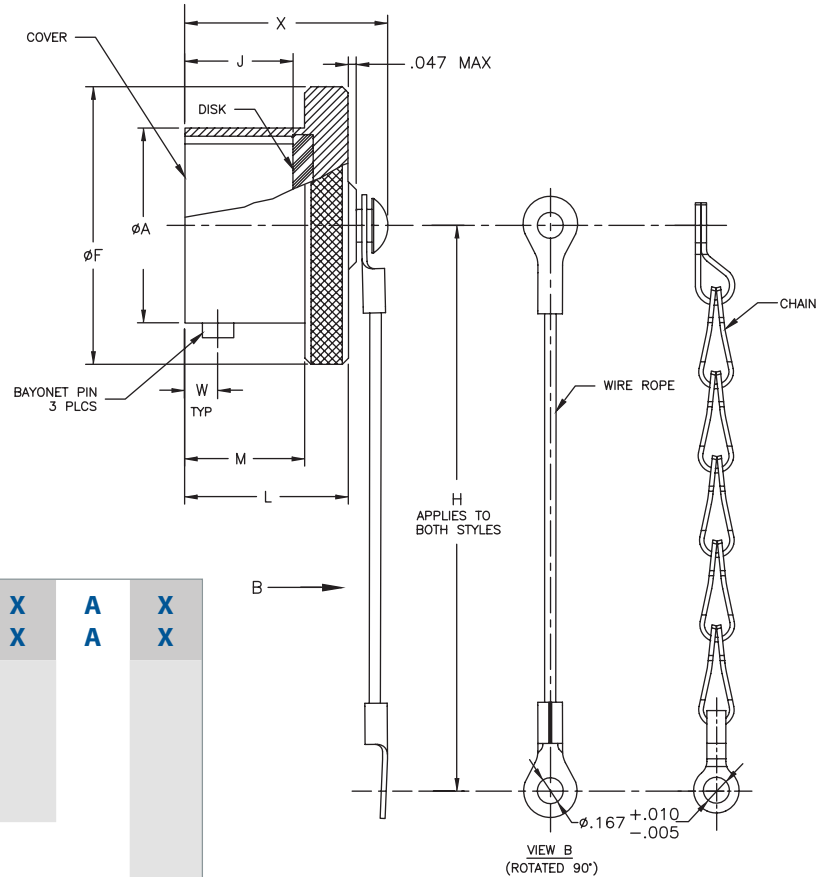

Part Number Configuration

MIL. Prefix	MS3180-	XX	X	A	X
Aero Prefix	AE1580-	XX	X	A	X
Shell Size	8 THRU 24 (Note: single digit for shell size 8)				
Style	C = Chain Assembly R = Wire Rope Assembly				
Material Finish	A = Aluminum, Hard Black Anodized (Consult factory for other plating options, must order via AE part #)				
Chain/Wire Rope Length	Blank - for standard length "H" L= 5.000 +.500/-.250				


SHELL SIZE	ØA		ØF MAX.		H		J		L Max.		M		W		X MAX	
	+ .001	+ .025			+ .500	+ 12.70	+ .010	+ .254			+ .031	+ .787				
	- .005	- .127	- .250	- 6.35	- .020	- .508	- .000	- .000								
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
8	.473	12.01	.719	18.26	3.000	76.20	.328	8.33	.562	14.27	.368	9.35	.100	2.54	.781	19.84
10	.590	14.99	.844	21.44	3.000	76.20	.328	8.33	.562	14.27	.368	9.35	.100	2.54	.781	19.84
12	.750	19.05	1.000	25.40	3.500	88.90	.328	8.33	.562	14.27	.368	9.35	.100	2.54	.781	19.84
14	.875	22.23	1.125	28.58	3.500	88.90	.328	8.33	.562	14.27	.368	9.35	.100	2.54	.781	19.84
16	1.000	25.40	1.250	31.75	3.500	88.90	.328	8.33	.562	14.27	.368	9.35	.100	2.54	.781	19.84
18	1.125	28.58	1.375	34.93	3.500	88.90	.328	8.33	.562	14.27	.368	9.35	.100	2.54	.781	19.84
20	1.250	31.75	1.500	38.10	4.000	101.60	.390	9.91	.625	15.88	.430	10.92	.100	2.54	.844	21.44
22	1.375	34.93	1.625	41.28	4.000	101.60	.390	9.91	.625	15.88	.430	10.92	.100	2.54	.844	21.44
24	1.500	38.10	1.750	44.45	4.000	101.60	.390	9.91	.625	15.88	.430	10.92	.109	2.77	.875	22.23

26482 S I



MS3181
Protective Cover, Receptacle
AE1581

Protective Cover, Receptacle

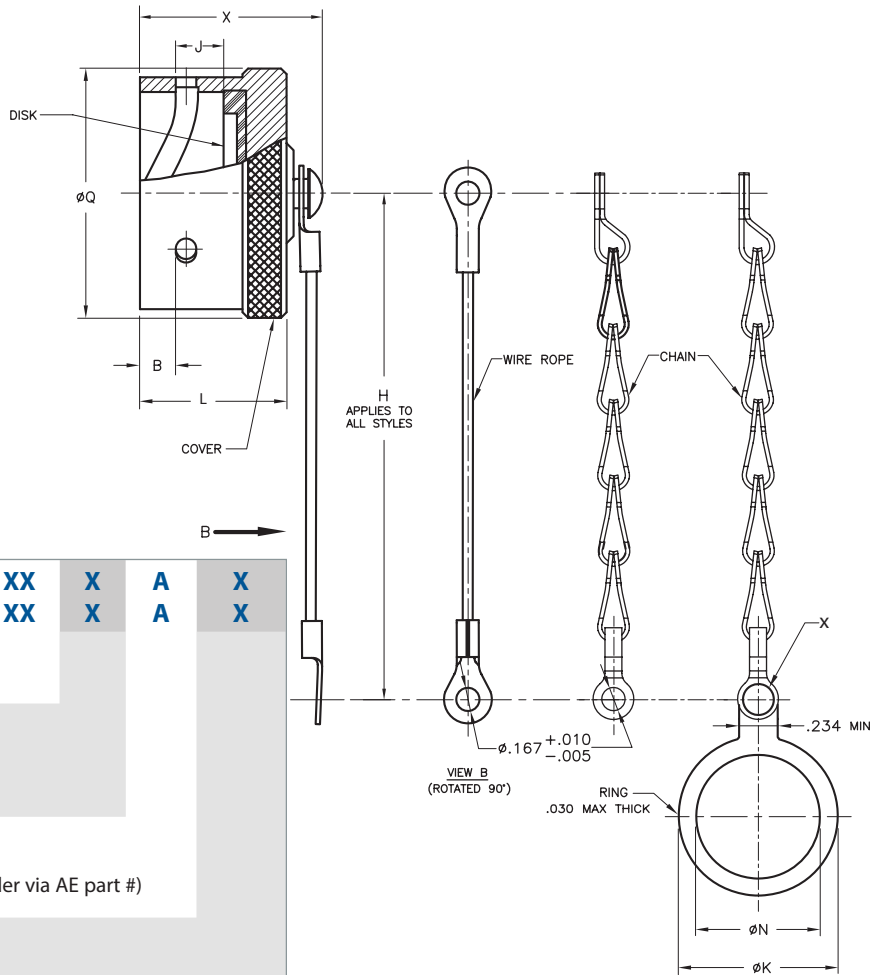

Part Number Configuration

MIL. Prefix	MS3181-	XX	X	A	X
Aero Prefix	AE1581-	XX	X	A	X
Shell Size	8 THRU 24 (Note: single digit for shell size 8)				
Style	<ul style="list-style-type: none"> C = Chain Assembly R = Wire Rope Assembly N = Chain/ Angled Ring Assembly 				
Material Finish	<ul style="list-style-type: none"> A = Aluminum, Hard Black Anodized (Consult factory for other or plating options, must order via AE part #) 				
Chain/Wire Rope Lengh	<ul style="list-style-type: none"> Blank - for standard length "H" L = 5.000 +.500/-.250 				

SHELL SIZE	B Max.		H		J		L Max.		ØN MIN.		ØQ Max.		ØK MAX		X MAX	
			+ .500	+12.70	+ .010	+ .0254										
	inch	mm	- .250	- 6.35	- .015	- 0.381	inch	mm								
8	.149	3.78	3.000	76.20	.115	2.92	.562	14.27	.578	14.68	.734	18.64	.812	20.62	.844	21.44
10	.149	3.78	3.000	76.20	.115	2.92	.562	14.27	.703	17.86	.859	21.82	1.000	25.40	.844	21.44
12	.149	3.78	3.500	88.90	.115	2.92	.562	14.27	.891	22.63	1.000	25.40	1.188	30.18	.844	21.44
14	.149	3.78	3.500	88.90	.115	2.92	.562	14.27	1.016	25.81	1.125	28.58	1.438	36.53	.844	21.44
16	.149	3.78	3.500	88.90	.115	2.92	.562	14.27	1.141	28.98	1.250	31.75	1.562	39.67	.844	21.44
18	.149	3.78	3.500	88.90	.115	2.92	.562	14.27	1.266	32.16	1.375	34.93	1.688	42.88	.844	21.44
20	.149	3.78	4.000	101.60	.115	2.92	.562	14.27	1.391	35.33	1.500	38.10	1.812	46.02	.844	21.44
22	.149	3.78	4.000	101.60	.115	2.92	.562	14.27	1.516	38.51	1.625	41.28	1.938	49.23	.844	21.44
24	.087	2.21	4.000	101.60	.147	3.73	.602	15.29	1.641	41.68	1.750	44.45	2.062	52.37	.875	22.23

MIL-DTL 26482 Series I

Polarization, Insert Availability & contact Information


Per MIL-STD-1669



Polarization (Insert Clocking)

1. In the normal insert clocking position (position N), the insert centerline coincides with the centerline of the master keyway (key) of the shell: $L = 0^\circ$.
2. In the alternate clocking positions (W, X, Y and Z), the pin insert (viewing from mating side) is rotated clockwise relative to the centerline of the master keyway (key) of the shell.
3. The socket insert is rotated counter-clockwise.
4. Plugs have keys; receptacles have keyways.

Note: Be careful with alternate positions. See table below for position availability on layouts of interest.

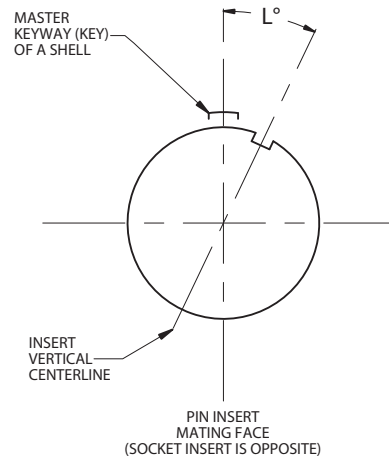

Insert Availability, Contact Information and Clocking Positions

Insert Arrangement	Total	Contact Quantity			Service	Insert Positions				
	No. of Contacts	By Size			Rating	In Degrees				
		20	16	12		N	W	X	Y	Z
8-2	2	2			I	0	58	122	—	—
8-3	3	3			I	0	60	210	—	—
8-4	4	4			I	0	45	—	—	—
8-33	3	3			I	0	90	—	—	—
8-98	3	3			I	0	—	—	—	—
10-6	6	6			I	0	90	—	—	—
10-7	7	7			I	0	90	—	—	—
10-98	6	6			I	0	90	180	240	270
12-3	3		3		II	0	—	—	180	—
12-8	8	8			I	0	90	112	203	292
12-10	10	10			I	0	60	155	270	295
14-5	5		5		II	0	40	92	184	273
14-12	12	8	4		I	0	43	90	—	—
14-15	15	14	1		I	0	17	110	155	234
14-18	18	18			I	0	15	90	180	270
14-19	19	19			I	0	30	165	315	—

Note: Insert arrangements are subject to availability

26482 S I



MIL-DTL 26482 Series I
Polarization, Insert Availability & contact Information
Per MIL-STD-1669

Insert Availability, Contact Information and Clocking Positions

Insert Arrangement	Aero-Electric		Total	Contact Quantity			Service	Insert Positions				
	Status		No. of	By Size			Rating	In Degrees				
	QPL'd	Tooled	Contacts	20	16	12		N	W	X	Y	Z
16-8	Yes	Yes	8		8		II	0	54	152	180	331
16-23	Yes	Yes	23	22	1		I	0	158	270	—	—
16-26	Yes	Yes	26	26			I	0	60	—	275	338
18-11	Yes	Yes	11		11		II	0	62	119	241	340
18-30	Yes	Yes	30	29	1		I	0	180	193	285	350
18-32	Yes	Yes	32	32			I	0	85	138	222	265
20-16	Yes	Yes	16		16		II	0	238	318	333	347
20-24	Yes	Yes	24	24			I	0	70	145	215	290
20-39	Yes	Yes	39	37	2		I	0	63	144	252	333
20-41	Yes	Yes	41	41			I	0	45	126	225	—
22-21	Yes	Yes	21		21		II	0	16	135	175	349
22-41	Yes	Yes	41	27	14		I	0	39	135	264	—
22-55	Yes	Yes	55	55			I	0	30	142	226	314
24-31	Yes	Yes	31		31		I	0	90	225	255	—
24-61	Yes	Yes	61	61			I	0	90	180	270	324

Note: Insert arrangements are subject to availability

26482 S I

Contact and Wire Data

Contact Size	Test Current	MAX. Voltage Drop			Finished Wire Ø Range		
	DC Test	wire size	Initial mV	After corrosion mV	wire size	Min	Max
	Amps						
20	7.5	24	45	55	24	.047 (1.19)	.083 (2.11)
		22	45	55	22		
		20	55	65	20		
16	13.0	20	45	55	20	.066 (1.68)	.109 (2.77)
		18	45	55	18		
		16	50	60	16		

Note: Test Current and Maximum Voltage Drop when tested with silver-plated wire at 25°C.

Insert Arrangement Views



8-2
2 # 20, I



8-3
3 # 20, I




8-4
4 # 20, I




8-33
3 # 20, I




8-98
3 # 20, I




10-6
6 # 20, I




10-7
7 # 20, I




10-98
6 # 20, I




12-3
3 # 16, II




12-8
8 # 20, I




12-10
10 # 20, I




14-5
5 # 16, II




14-12
4 # 16, 8 # 20, I




14-15
1 # 16, 14 # 20, I




14-18
18 # 20, I




14-19
19 # 20, I




16-8
8 # 16, II




16-23
1 # 16, 22 # 20, I




16-26
26 # 20, I




18-11
11 # 16, II



18-30
1 # 16, 29 # 20, I




18-32
32 # 20, I




20-1 6
16 # 16, II

Note: Insert arrangements are subject to availability


26482 S I

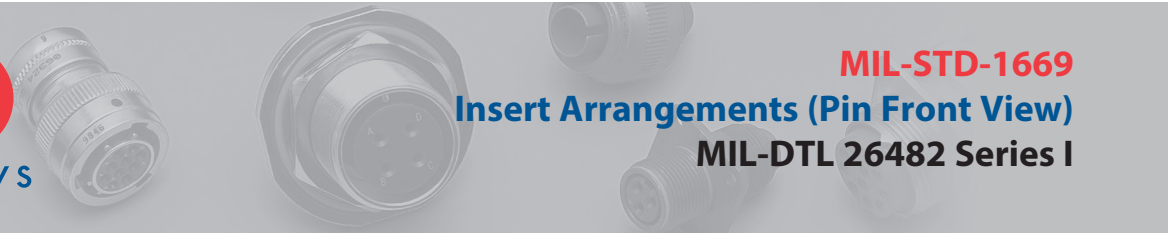


Insert Arrangement Views




20-24
24# 20, I




20-39
2 # 16, 37# 20, I




20-41
41# 20, I




22-21
21# 16, II




22-41
14# 16, 27# 20, I



22-55
55# 20, I



24-31
31# 16, I



24-61
61# 20, I

26482 S I

Note: Insert arrangements are subject to availability



MIL-DTL-26482 Series I PC tail selection For AE712 and AE714 only



To choose an alternate contact length or diameter, locate the preferred length and diameter of contact in the tables on pages 16 through 20. Select the modification code dash number specified for that contact configuration. Add the modification code to the end of the connector part number created from the part number builder.

For example: A connector using size 20 pin contacts with a diameter of .0019" and pc-tail length of 0.110" is required, the connector part number needs to be specified with a -1101 added to the end of the part number to specify the specific length and diameter required by the designer. Consult factory for further information or assistance.

Contact	Modification Code	Diameter	Tolerance	Tail Length	Tolerance
Size 20 Pin	Standard Config.	0.019	+/- .001	0.250	+/- .020
Size 20 Pin	-1201	0.019	+/- .001	0.110	+/- .020
Size 20 Pin	-1202	0.019	+/- .001	0.130	+/- .020
Size 20 Pin	-1203	0.019	+/- .001	0.150	+/- .020
Size 20 Pin	-1204	0.019	+/- .001	0.170	+/- .020
Size 20 Pin	-1205	0.019	+/- .001	0.190	+/- .020
Size 20 Pin	-1206	0.019	+/- .001	0.210	+/- .020
Size 20 Pin	-1207	0.019	+/- .001	0.230	+/- .020
Size 20 Pin	-1208	0.019	+/- .001	0.270	+/- .020
Size 20 Pin	-1210	0.019	+/- .001	0.310	+/- .020
Size 20 Pin	-1212	0.019	+/- .001	0.350	+/- .020
Size 20 Pin	-1214	0.019	+/- .001	0.390	+/- .020
Size 20 Pin	-1216	0.019	+/- .001	0.430	+/- .020
Size 20 Pin	-1218	0.019	+/- .001	0.470	+/- .020
Size 20 Pin	-1220	0.019	+/- .001	0.510	+/- .020
Size 20 Pin	-1221	0.025	+/- .001	0.110	+/- .020
Size 20 Pin	-1222	0.025	+/- .001	0.130	+/- .020
Size 20 Pin	-1223	0.025	+/- .001	0.150	+/- .020
Size 20 Pin	-1224	0.025	+/- .001	0.170	+/- .020
Size 20 Pin	-1225	0.025	+/- .001	0.190	+/- .020
Size 20 Pin	-1226	0.025	+/- .001	0.210	+/- .020
Size 20 Pin	-1227	0.025	+/- .001	0.230	+/- .020
Size 20 Pin	-1228	0.025	+/- .001	0.250	+/- .020
Size 20 Pin	-1229	0.025	+/- .001	0.270	+/- .020
Size 20 Pin	-1231	0.025	+/- .001	0.310	+/- .020
Size 20 Pin	-1233	0.025	+/- .001	0.350	+/- .020
Size 20 Pin	-1235	0.025	+/- .001	0.390	+/- .020
Size 20 Pin	-1237	0.025	+/- .001	0.430	+/- .020
Size 20 Pin	-1239	0.025	+/- .001	0.470	+/- .020
Size 20 Pin	-1241	0.025	+/- .001	0.510	+/- .020



26482 S I





MIL-DTL-26482 Series I
PC tail selection
For AE712 and AE714 only

To choose an alternate contact length or diameter, locate the preferred length and diameter of contact in the tables on pages 16 through 20. Select the modification code dash number specified for that contact configuration. Add the modification code to the end of the connector part number created from the part number builder.

For example: A connector using size 20 pin contacts with a diameter of .0019" and pc-tail length of 0.110" is required, the connector part number needs to be specified with a -1101 added to the end of the part number to specify the specific length and diameter required by the designer. Consult factory for further information or assistance.

Contact	Modification Code	Diameter	Tolerance	Tail Length	Tolerance
Size 20 Socket	Standard Config.	0.019	+/- .001	0.250	+/- .020
Size 20 Socket	-1501	0.019	+/- .001	0.110	+/- .020
Size 20 Socket	-1502	0.019	+/- .001	0.130	+/- .020
Size 20 Socket	-1503	0.019	+/- .001	0.150	+/- .020
Size 20 Socket	-1504	0.019	+/- .001	0.170	+/- .020
Size 20 Socket	-1505	0.019	+/- .001	0.190	+/- .020
Size 20 Socket	-1506	0.019	+/- .001	0.210	+/- .020
Size 20 Socket	-1507	0.019	+/- .001	0.230	+/- .020
Size 20 Socket	-1508	0.019	+/- .001	0.270	+/- .020
Size 20 Socket	-1510	0.019	+/- .001	0.310	+/- .020
Size 20 Socket	-1512	0.019	+/- .001	0.350	+/- .020
Size 20 Socket	-1514	0.019	+/- .001	0.390	+/- .020
Size 20 Socket	-1516	0.019	+/- .001	0.430	+/- .020
Size 20 Socket	-1518	0.019	+/- .001	0.470	+/- .020
Size 20 Socket	-1520	0.019	+/- .001	0.510	+/- .020
Size 20 Socket	-1521	0.025	+/- .001	0.110	+/- .020
Size 20 Socket	-1522	0.025	+/- .001	0.130	+/- .020
Size 20 Socket	-1523	0.025	+/- .001	0.150	+/- .020
Size 20 Socket	-1524	0.025	+/- .001	0.170	+/- .020
Size 20 Socket	-1525	0.025	+/- .001	0.190	+/- .020
Size 20 Socket	-1526	0.025	+/- .001	0.210	+/- .020
Size 20 Socket	-1527	0.025	+/- .001	0.230	+/- .020
Size 20 Socket	-1528	0.025	+/- .001	0.250	+/- .020
Size 20 Socket	-1529	0.025	+/- .001	0.270	+/- .020
Size 20 Socket	-1531	0.025	+/- .001	0.310	+/- .020
Size 20 Socket	-1533	0.025	+/- .001	0.350	+/- .020
Size 20 Socket	-1535	0.025	+/- .001	0.390	+/- .020
Size 20 Socket	-1537	0.025	+/- .001	0.430	+/- .020
Size 20 Socket	-1539	0.025	+/- .001	0.470	+/- .020
Size 20 Socket	-1541	0.025	+/- .001	0.510	+/- .020



26482 S I

MIL-DTL-26482 Series I

PC tail selection



For AE712 and AE714 only



To choose an alternate contact length or diameter, locate the preferred length and diameter of contact in the tables on pages 16 through 20. Select the modification code dash number specified for that contact configuration. Add the modification code to the end of the connector part number created from the part number builder.

For example: A connector using size 20 pin contacts with a diameter of .0019" and pc-tail length of 0.110" is required, the connector part number needs to be specified with a -1101 added to the end of the part number to specify the specific length and diameter required by the designer. Consult factory for further information or assistance.

Contact	Modification Code	Diameter	Tolerance	Tail Length	Tolerance
Size 16 Pin	Standard Config.	0.062	+/- .001	0.250	+/- .020
Size 16 Pin	-1301	0.062	+/- .001	0.110	+/- .020
Size 16 Pin	-1302	0.062	+/- .001	0.130	+/- .020
Size 16 Pin	-1303	0.062	+/- .001	0.150	+/- .020
Size 16 Pin	-1304	0.062	+/- .001	0.170	+/- .020
Size 16 Pin	-1305	0.062	+/- .001	0.190	+/- .020
Size 16 Pin	-1306	0.062	+/- .001	0.210	+/- .020
Size 16 Pin	-1307	0.062	+/- .001	0.230	+/- .020
Size 16 Pin	-1308	0.062	+/- .001	0.270	+/- .020
Size 16 Pin	-1310	0.062	+/- .001	0.310	+/- .020
Size 16 Pin	-1312	0.062	+/- .001	0.350	+/- .020
Size 16 Pin	-1314	0.062	+/- .001	0.390	+/- .020
Size 16 Pin	-1316	0.062	+/- .001	0.430	+/- .020
Size 16 Pin	-1318	0.062	+/- .001	0.470	+/- .020
Size 16 Pin	-1320	0.062	+/- .001	0.510	+/- .020
Size 16 Pin	-1321	0.040	+/- .001	0.110	+/- .020
Size 16 Pin	-1322	0.040	+/- .001	0.130	+/- .020
Size 16 Pin	-1323	0.040	+/- .001	0.150	+/- .020
Size 16 Pin	-1324	0.040	+/- .001	0.170	+/- .020
Size 16 Pin	-1325	0.040	+/- .001	0.190	+/- .020
Size 16 Pin	-1326	0.040	+/- .001	0.210	+/- .020
Size 16 Pin	-1327	0.040	+/- .001	0.230	+/- .020
Size 16 Pin	-1328	0.040	+/- .001	0.250	+/- .020
Size 16 Pin	-1329	0.040	+/- .001	0.270	+/- .020
Size 16 Pin	-1331	0.040	+/- .001	0.310	+/- .020
Size 16 Pin	-1333	0.040	+/- .001	0.350	+/- .020
Size 16 Pin	-1335	0.040	+/- .001	0.390	+/- .020
Size 16 Pin	-1337	0.040	+/- .001	0.430	+/- .020
Size 16 Pin	-1339	0.040	+/- .001	0.470	+/- .020
Size 16 Pin	-1341	0.040	+/- .001	0.510	+/- .020



26482 S I





MIL-DTL-26482 Series I
PC tail selection
For AE712 and AE714 only

To choose an alternate contact length or diameter, locate the preferred length and diameter of contact in the tables on pages 16 through 20. Select the modification code dash number specified for that contact configuration. Add the modification code to the end of the connector part number created from the part number builder.

For example: A connector using size 20 pin contacts with a diameter of .0019" and pc-tail length of 0.110" is required, the connector part number needs to be specified with a -1101 added to the end of the part number to specify the specific length and diameter required by the designer. Consult factory for further information or assistance.

Contact	Modification Code	Diameter	Tolerance	Tail Length	Tolerance
Size 16 Socket	Standard Config.	0.062	+/- .001	0.250	+/- .020
Size 16 Socket	-1601	0.062	+/- .001	0.110	+/- .020
Size 16 Socket	-1602	0.062	+/- .001	0.130	+/- .020
Size 16 Socket	-1603	0.062	+/- .001	0.150	+/- .020
Size 16 Socket	-1604	0.062	+/- .001	0.170	+/- .020
Size 16 Socket	-1605	0.062	+/- .001	0.190	+/- .020
Size 16 Socket	-1606	0.062	+/- .001	0.210	+/- .020
Size 16 Socket	-1607	0.062	+/- .001	0.230	+/- .020
Size 16 Socket	-1608	0.062	+/- .001	0.270	+/- .020
Size 16 Socket	-1610	0.062	+/- .001	0.310	+/- .020
Size 16 Socket	-1612	0.062	+/- .001	0.350	+/- .020
Size 16 Socket	-1614	0.062	+/- .001	0.390	+/- .020
Size 16 Socket	-1616	0.062	+/- .001	0.430	+/- .020
Size 16 Socket	-1618	0.062	+/- .001	0.470	+/- .020
Size 16 Socket	-1620	0.062	+/- .001	0.510	+/- .020
Size 16 Socket	-1621	0.040	+/- .001	0.110	+/- .020
Size 16 Socket	-1622	0.040	+/- .001	0.130	+/- .020
Size 16 Socket	-1623	0.040	+/- .001	0.150	+/- .020
Size 16 Socket	-1624	0.040	+/- .001	0.170	+/- .020
Size 16 Socket	-1625	0.040	+/- .001	0.190	+/- .020
Size 16 Socket	-1626	0.040	+/- .001	0.210	+/- .020
Size 16 Socket	-1627	0.040	+/- .001	0.230	+/- .020
Size 16 Socket	-1628	0.040	+/- .001	0.250	+/- .020
Size 16 Socket	-1629	0.040	+/- .001	0.270	+/- .020
Size 16 Socket	-1631	0.040	+/- .001	0.310	+/- .020
Size 16 Socket	-1633	0.040	+/- .001	0.350	+/- .020
Size 16 Socket	-1635	0.040	+/- .001	0.390	+/- .020
Size 16 Socket	-1637	0.040	+/- .001	0.430	+/- .020
Size 16 Socket	-1639	0.040	+/- .001	0.470	+/- .020
Size 16 Socket	-1641	0.040	+/- .001	0.510	+/- .020



26482 S I